

# Emergency escape lighting

## Version „KAPPA“



### Emergency escape lighting Version „KAPPA“

**Surface mounted lamp  
recessed  
Central battery system**

**Luminous intensity distribution:  
Anti-panic lighting**


### Specification

|                                   |                                                               |        |
|-----------------------------------|---------------------------------------------------------------|--------|
| Version                           | KAPPA recessed lamp                                           |        |
| Light distribution                | symmetric<br>(Please ask for: Isolux diagram / EULUMDAT-data) |        |
| Mounting                          | Surface mounted recessed                                      |        |
| Light source                      | 2 x 3 W LED                                                   |        |
| Power                             | 230 V without Monitoring single lamps                         | 7,1 VA |
|                                   | 230 V with Monitoring single lamps                            | 8,0 VA |
|                                   | 24 V with Monitoring single lamps                             | 6,0 W  |
| Ambient temperature               | -10 °C - +40 °C                                               |        |
| IP class                          | IP 40                                                         |        |
| Protection class                  | I for 230 V<br>III for 24 V                                   |        |
| Housing                           | Steel sheet coloured, standard colour RAL 9010 (white)        |        |
| LED-Panel                         | Steel sheet coloured, standard colour RAL 9005 (black)        |        |
| Weight                            | ca. 0,5 kg                                                    |        |
| Dimension (Ø x depth)             | Ø 130 mm x 60 mm                                              |        |
| Terminal                          | WAGO Lighting connector 2,5 mm <sup>2</sup>                   |        |
| Installation in flash-mounted box | Flash-mounted box delivery component (no. 9073-91)            |        |

### Order information

|                                       | Standard colour RAL 9010 | Special colour Y = RAL colour |
|---------------------------------------|--------------------------|-------------------------------|
| 24 V with Monitoring single lamps     | 752590 – EKP/Z-24/S/Z/DE | 752591 – EKP/Z-24/S/Y/DE/RAL  |
| 230 V with Monitoring single lamps    | 752530 – EKP/Z/S/Z/DE/08 | 752531 – EKP/Z/S/Y/DE/08/RAL  |
| 230 V without Monitoring single lamps | 752510 – EKP/Z/S/Z/DE/N  | 752511 – EKP/Z/S/Y/DE/N/RAL   |

## Dimension

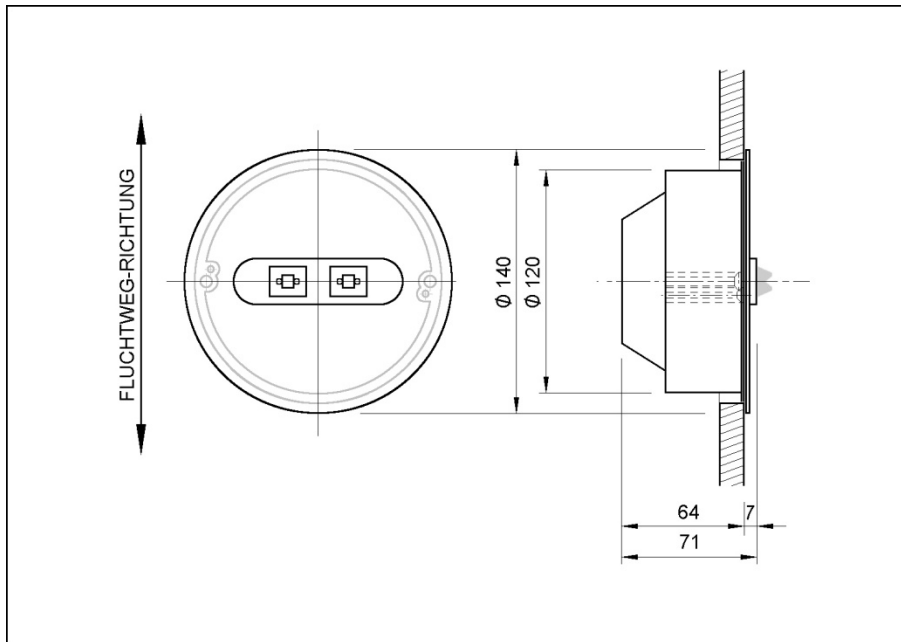

## Installation

See document „Installation instruction Emergency escape lighting version KAPPA surface mounted recessed“

### **Forchheim und Willing GmbH**

Südstraße 21  
09221 Neukirchen / Erzgebirge - Germany

Phone: 0049 371 27816-0  
Fax: 0049 371 27816-29  
E-Mail: [info@forchheim-willing.de](mailto:info@forchheim-willing.de)  
Internet: [www.forchheim-willing.de](http://www.forchheim-willing.de)